



# RV SERIES



a pulverising level of high quality

## Enjoy your choice:

The RV series has been designed to fulfill the functions of primary and secondary demolition.

Manufactured specifically with HARDOX for maximum wear and tear resistance, the RV hydraulic rotating pulverisers are equipped with a regenerative circuit for a responsive opening and closing of their powerful jaws. The RV series is further strengthened by a hydraulic rotation (360°) that allows maximum precision for pulveriser placement in any working condition.

- Innovative "PRV" (Pressure Relief Valve) that protects the pulveriser from high pressure;
- equipment manufactured with HARDOX 400;
- a reversed cylinder for rod protection;
- speed valve;
- interchangeable blades and teeth.

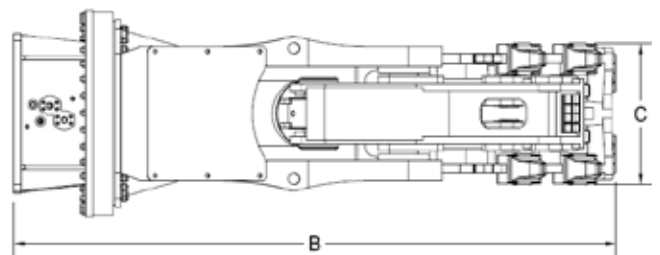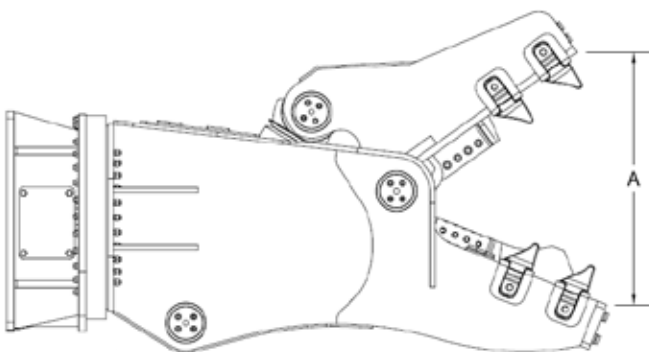

# RV SERIES

## PULVERISERS

RV MODEL	U.M.	RV 6	RV 10	RV 16	RV 20	RV 25	RV 30	RV 40	RV 60	RV 80	RV 110
APERTURA (A)	mm	520	630	780	820	910	1040	1130	1280	1350	1720
OPENING (A)	in.	20	25	30	32	36	41	45	50	53	68
LUNGHEZZA (B)	mm	1410	1900	2330	2390	2510	2660	2850	3230	3400	3800
LENGTH (B)	in.	55	75	92	94	99	105	112	127	134	150
LARGHEZZA (C)	mm	340	380	460	480	480	510	550	660	620	650
WIDTH (C)	in.	13,4	15	18,1	18,9	18,9	20,1	21,65	25,98	24,4	25,6
PESO ESCAVATORE	ton	7/12	9/15	15/20	20/26	25/32	30/40	38/55	50/80	70/90	90/120
EXCAVATOR WEIGHT	lbs	14000/ 24000	18000/ 30000	30000/ 40000	40000/ 52000	50000/ 64000	60000/ 80000	76000/ 110000	100000/ 180000	140000/ 180000	180000/ 240000
PESO	Kg	600	1050	1610	1900	2580	3040	3940	6000	7800	9950
EQUIPMENT WEIGHT	lbs	1323	2315	3549	4189	5688	6702	8333	13228	17196	21936
PRESSIONE OLIO	Bar	250	310	340	340	340	340	340	340	340	340
OIL PRESSURE	psi	3625	4496	4931	4931	4931	4931	4931	4931	4931	4931
PORTATA OLIO	l/min	80/100	180/220	180/220	210/260	250/300	300/350	300/350	300/400	400/500	500/600
OIL CAPACITY	gal/min	21/26	47/58	47/58	55/68	66/79	79/92	79/92	79/105	106/132	132/158
PRESSIONE OLIO ROTAZIONE	Bar	60	140	140	140	140	140	140	140	140	140
ROTATION OIL PRESSURE	psi	870	2030	2030	2030	2030	2030	2030	2030	2030	2030
PORTATA OLIO ROTAZIONE	l/min	20	30	30	30	30	30	60	60	60	60
ROTATION OIL CAPACITY	gal/min	5,2	8	8	8	8	8	16	16	16	16

